


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY



P/N	Length (L)	Width (W)	Thickness (T)	Max. Bundle Ø	Min. Loop Tensile Str.	TYPE
	mm	mm	mm	mm	kgf	1
<b>MINIATURE TYPE</b>						
0377AF01XR	100,0	2,5	1,1	22,0	8,2	1
0139AF01XR	140,0	2,5	1,1	33,0	8,2	1
2297AF01XR	160,0	2,5	1,1	40,0	8,2	1
0382AF01XR	200,0	2,5	1,2	53,0	8,2	1
<b>INTERMEDIATE TYPE</b>						
0383AF01XR	150,0	3,6	1,2	35,0	18,2	1
2294AF01XR	200,0	3,6	1,2	53,0	18,2	1
2295AF01XR	300,0	3,6	1,2	76,0	18,2	1

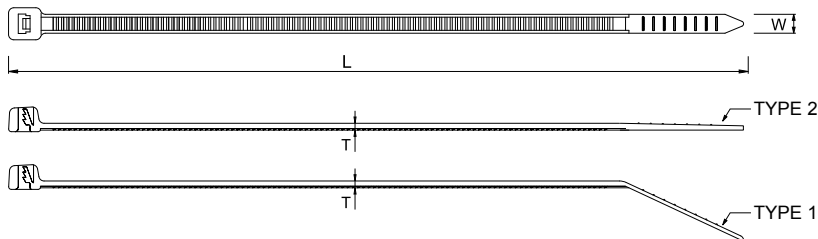

<b>STANDARD TYPE</b>						
0386AF01XR	200,0	4,8	1,3	50,0	22,6	1
0387AF01XR	300,0	4,8	1,3	76,0	22,6	1
0376AF01XR	370,0	4,8	1,3	102,0	22,6	1
2431AF01XR	430,0	4,8	1,3	110,0	22,6	2
<b>LIGHT HEAVY DUTY TYPE</b>						
1291AF01XR	300,0	7,6	1,6	76,0	54,5	2
0374AF01XR	370,0	7,6	1,6	102,0	54,5	2
0375AF01XR	450,0	7,6	1,8	130,0	54,5	2
19203AF01XR	603,0	7,6	1,6	175,0	54,5	2
<b>HEAVY DUTY TYPE</b>						
19204AF01XR	530,0	9,0	1,8	140,0	79,3	2
<b>EXTRA HEAVY DUTY TYPE</b>						
1294AF01XR	480,0	12,6	2,0	120,0	113,4	2

WORKING TEMPERATURE: -40°C....+85°C



		TITLE <b>CABLE TIES UV RESISTANT</b>	
		MATERIAL PA 6.6 V2(UL94)	DATE 28/03/2024
PART NUMBER SEE ABOVE		DRAWN A.C.	
DRAWING NUMBER 24/03/28.0377.X		CHECK	
SIZE A4	SCALE NTS	COLOR BLACK	APPROVED
UNIT mm.	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	