


DIM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

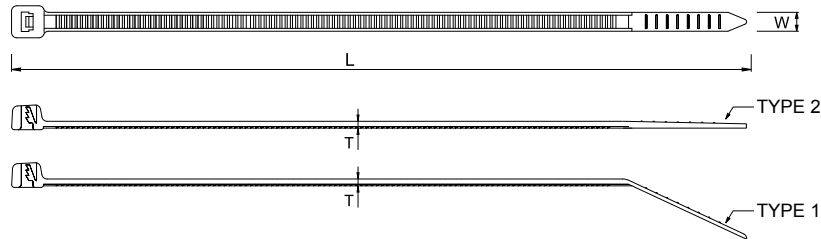

P/N	Length (L)	Width (W)	Thickness (T)	Max. Bundle Ø	Min. Loop Tensile Str.	TYPE
	mm	mm	mm	mm	kgf	
MINIATURE TYPE						
0377AT01XR	100,0	2,5	1,1	22,0	8,2	1
0139AT01XR	140,0	2,5	1,1	33,0	8,2	1
2297AT01XR	160,0	2,5	1,1	40,0	8,2	1
0382AT01XR	200,0	2,5	1,2	53,0	8,2	1
INTERMEDIATE TYPE						
0383AT01XR	140,0	3,6	1,2	35,0	18,2	1
2294AT01XR	200,0	3,6	1,2	53,0	18,2	1
2295AT01XR	300,0	3,6	1,2	76,0	18,2	1
STANDARD TYPE						
0386AT01XR	200,0	4,8	1,3	50,0	22,6	1
0387AT01XR	300,0	4,8	1,3	76,0	22,6	1
0376AT01XR	370,0	4,8	1,3	102,0	22,6	1
LIGHT HEAVY DUTY TYPE						
1291AT01XR	300,0	7,6	1,6	76,0	54,5	2
0374AT01XR	370,0	7,6	1,6	102,0	54,5	2
HEAVY DUTY TYPE						
19204AT01XR	530,0	9,0	1,8	140,0	79,3	2

WORKING TEMPERATURE: -40°C...+120°C



		TITLE CABLE TIES	
		MATERIAL PA 6.6 V2(UL94)	DATE 28/03/2024
PART NUMBER SEE ABOVE		DRAWN A.C.	
DRAWING NUMBER 24/03/28.0377.E		CHECK	
SIZE A4	SCALE NTS	COLOR BLACK	APPROVED
UNIT mm.	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	